



SPRAY FOAM CONTAINER HEATERS


Avoiding temperature-related problems with spray foam is vital for your business. Powerblanket's spray foam heating blankets cover the entire cylinder and prevent heat from leaking out, allowing you to continue business through the cold winter months and preventing product waste.



WANT GREATER PEACE OF MIND?
Try Powerblanket with Beacon Controllers

"Year after year, Powerblanket products play an important role in our customers' spray foam and polyurea coating projects. Reliable, quality equipment is essential to success and efficiency in our industry, and Powerblanket continues to deliver just that, along with top notch customer service and warranty protection. That's why they are the only drum and tote heating products I recommend to my customers."

Jeff Wheat, Specialty Product, Inc.

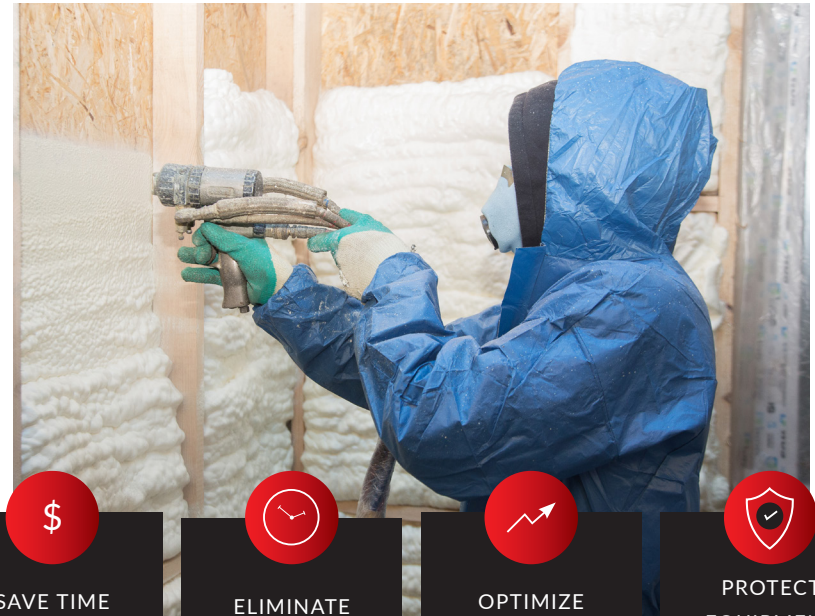

SAVE TIME
& MONEY



ELIMINATE
DOWNTIME



OPTIMIZE
OPERATIONS



PROTECT
EQUIPMENT
& MATERIALS

WHY DOES HEAT MATTER?

SEPARATION

- Separation of the material means delays on the job site. Everything is on hold while you remix product.

VISCOSITY DRIFT

- Every 18°F drop in temperature will double viscosity. Higher viscosity stalls pumps.

YIELD

- A cold preheat temperature will result in lower yields.



SPRAY FOAM CONTAINER HEATERS

Product Category	Model #	Temperature Control	Approximate Product Temp*	Container Volume	Container Dimensions	Plug Type	AC Voltage	Nominal Power	Nominal Amperage	Approximate Weight/ Mass
BARREL HEATERS	BH55RR-80	Internal Preset	80° F (± 10° F) / 27° C (± 5° C)	55 Gal / 208 L	23.3"D x 34.9"H / 59 cm D x 89 cm H	15 AMP Plug	120V	800W	6.67A	11 lbs / 5 kg
	BH55RR-100	Internal Preset	100° F (± 10° F) / 38° C (± 5° C)	55 Gal / 208 L	23.3"D x 34.9"H / 59 cm D x 89 cm H	15 AMP Plug	120V	800W	6.67A	11 lbs / 5 kg
	BH55RR-120	Internal Preset	120° F (± 10° F) / 49° C (± 5° C)	55 Gal / 208 L	23.3"D x 34.9"H / 59 cm D x 89 cm H	15 AMP Plug	120V	800W	6.67A	11 lbs / 5 kg
	BH55PRO	Programmable Digital Controller	up to 145° F (± 5° F) / 63° C (± 3° C)	55 Gal / 208 L	23.3"D x 34.9"H / 59 cm D x 89 cm H	15 AMP Plug	120V	800W	6.67A	13 lbs / 6 kg
FOAM BOX HEATERS	FBW600	Internal Preset	110° F (± 10° F) / 43° C (± 5° C)	600 board foot box	Single Cylinder	15 AMP Plug	120V	280W	2.33A	8 lbs / 4 kg
	FBW200	Internal Preset	110° F (± 10° F) / 43° C (± 5° C)	200 board foot box	Disposable Box	15 AMP Plug	120V	280W	2.33A	8 lbs / 4 kg
FOAM CYLINDER HEATERS	FCW600	Internal Preset	90° F (± 10° F) / 32°C (± 5° C)	600 board foot cylinder	12" D x 15" H / 30cm x 38cm	15 AMP Plug	120V	95W	0.79A	4 lbs / 2 kg
	FCW17	Internal Preset	90° F (± 10° F) / 32°C (± 5° C)	17 Gallon Cylinder	15" D x 27" H / 38cm x 69cm	15 AMP Plug	120V	400W	3.33A	6 lbs / 3 kg
	FCW60	Internal Preset	90° F (± 10° F) / 32°C (± 5° C)	60 Gallon Cylinder	24" D x 34" H / 61cm x 86cm	15 AMP Plug	120V	550W	4.58A	8 lbs / 4 kg
	FCW27	Internal Preset	90° F (± 10° F) / 32°C (± 5° C)	27 Gallon Cylinder	15" D x 44" H / 38cm x 112cm	15 AMP Plug	120V	720W	6.00A	12 lbs / 5.5 kg
	FCW15H	N/A	N/A	Insulated Hood 17/27 gal. cylinder	Insulated Hood 17/27 gal. cylinder	N/A	N/A	N/A	N/A	2 lbs / 1 kg

READY TO SHIP

- Works on both steel and poly containers
- Fully insulated to retain heat in spray foam containers
- Safety Certification UL/CSA, CE
- Patented energy efficient technology lowers energy-related costs
- Decreases product waste by eliminating fluctuations with preheat temperatures



PHONE: 844.773.6169

FAX: 866.245.9483

EMAIL: INFO@POWERBLANKET.COM

3130 SOUTH 1030 WEST, SUITE 1

SALT LAKE CITY, UT 84119

WWW.POWERBLANKET.COM